


ECO10000INSBLK

Product description: insulated cylindrical water tank

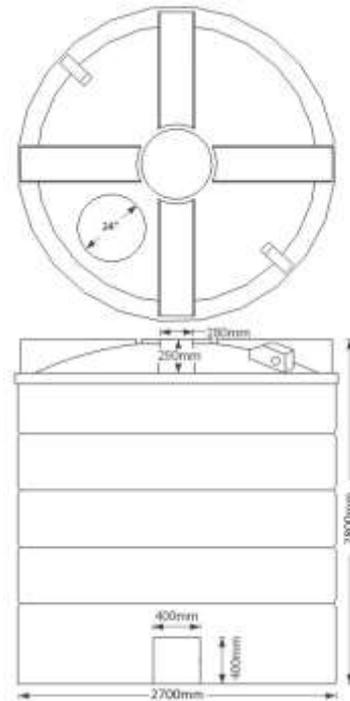

Product Information				
Height	Diameter	Overall weight	Tank connection	Lid
2800mm	2700mm	c600kg	2" BSP	24" screwdown outer 16" screwdown inner

Sizes approximate, owing to shrinkage
Specification subject to change; please call to confirm details

PRODUCT NOTES:

- Always keep tank upright. Never roll or put on its side.
- Tank must be sited on a level, fully supporting base
- Ensure that all fittings are insulated

PRODUCT DETAILS:

- The perfect self-contained solution for the storage of non-potable water in harsh conditions
- Double wall construction
- SF19 SuperFOIL insulation
- 16" vented inner lid
- 2" brass threaded outlet bulkhead and plastic valve as standard

OPTIONAL EXTRAS:

- Potable version, made from WRAS approved polymer
- Tank connectors
- ½ - 4" outlet options
- Stainless steel insert outlet – 1-2"

BENEFITS:

- Water is protected from external conditions
- Outer tank encapsulates and protects the insulation
- Covered bund prevents collection of rainwater & debris
- Opaque plastic reduces algae growth in sunlight
- Value for money insulated water storage
- Cost effective alternative to insulated GRP/FRP water storage tanks
- Rugged construction
- Rotationally moulded for strength & durability
- 2 year warranty against manufacturing defects



Scan to view our full range of water tanks



Etilts Ltd,
Unit 1
Whiting Way
Melbourn,
Royston,
SG8 6NA



Call 01763 261781

ECO10000INSBLK

Product description: insulated cylindrical water tank

TECHNICAL DATA

Tanks


- Rotationally moulded from one or more of the following polymers:
 - ICORENE 1314/ 3560 (if coloured)
 - REVOLVE M-748 (black)/N307 (natural)/ N250 (colour)
- Data sheets available
- 2" BSP bulkhead & valve
- 24" screwdown lid on outer housing; 16" inner screwdown lid

Inner tank dimensions:

Capacity	Height	Diameter
10000 Litres	2500mm	2400mm

Insulation

- SF19 SuperFOIL
- Standard thickness 40mm
- BBA Agrément and LABC Registered System Approval
- BBA certified R value of 2.58.
- Dupont ultra efficient nano coating technology.
- SF19 SuperFOIL also acts as a radiant barrier to reflect excessive heat gain during the summer months as well as insulating throughout the year
- Water Vapour Resistance 1200MNs/g
- Resistance to water penetration W1
- Flexibility at low temp. -40c
- Tensile Properties - Length (After Ageing) 635 N/50mm
- Tensile Properties - Width (After Ageing) 580 N/50mm

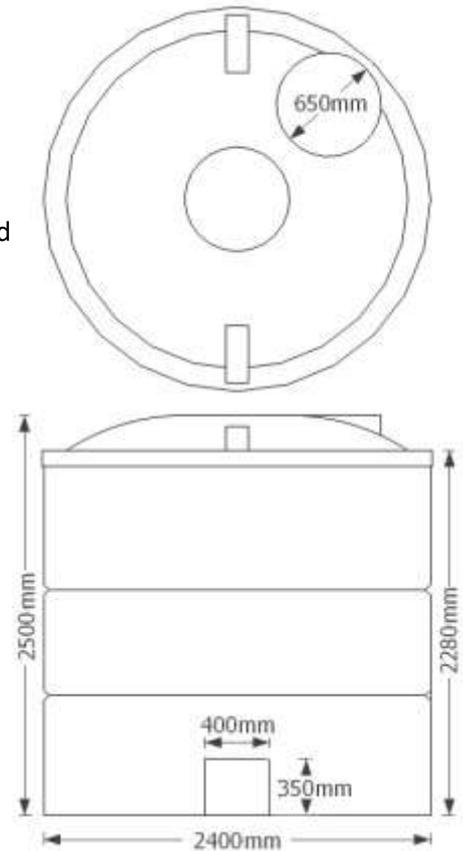

Call 01763 261781