


ECO4500T

Product description: cylindrical open top tank, suitable for internal or external use

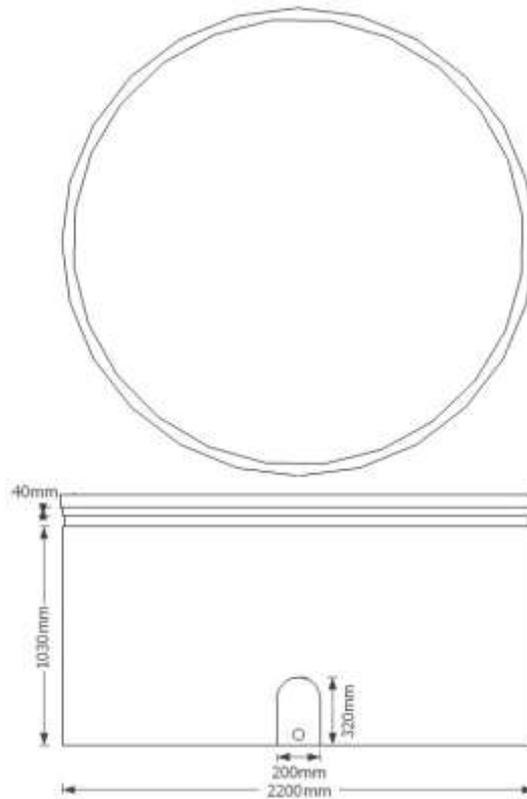

Product Information

Height	Diameter	Weight	Outlet
1180mm	2200mm	90kg	1", or 2", or blank

Sizes approximate, owing to shrinkage
Specification subject to change; please call to confirm details

PRODUCT NOTES:

- Tank must be sited on a level, fully supportive base leaving a gap of at least 50mm from walls or other tanks
- Additional fittings can be added as and where required without compromising tank's structural integrity

PRODUCT DETAILS:

- Manufactured in black polymer as standard
- Approximate wall thickness: 5-6mm
- 2" brass threaded outlet moulded into tank, as standard
- Can be moulded blank if required

OPTIONAL EXTRAS:

- 1" threaded outlet, or moulded blank (no outlet)
- Brass tap
- Brass isolation valve with hose connector
- Tank connectors
- Ball cock and float valve
- Coloured polymer to suit location
- Stainless steel outlet

BENEFITS:

- Suitable for internal and external use
- Frost proof; will not crack in cold
- Value for money, high capacity holding tank
- Ideal for domestic or commercial use
- Robust, heavy duty product; industrial strength
- Smooth sides for easy cleaning
- Rotationally moulded for strength and durability
- 1 year warranty against manufacturing defects



Etills Ltd,
Unit 1 Whiting Way,
Melbourn,
Royston,
SG8 6NA

Call 01763 261781