


ECO500WBV2UND

Product description: underground deep profile 500 litre water tank

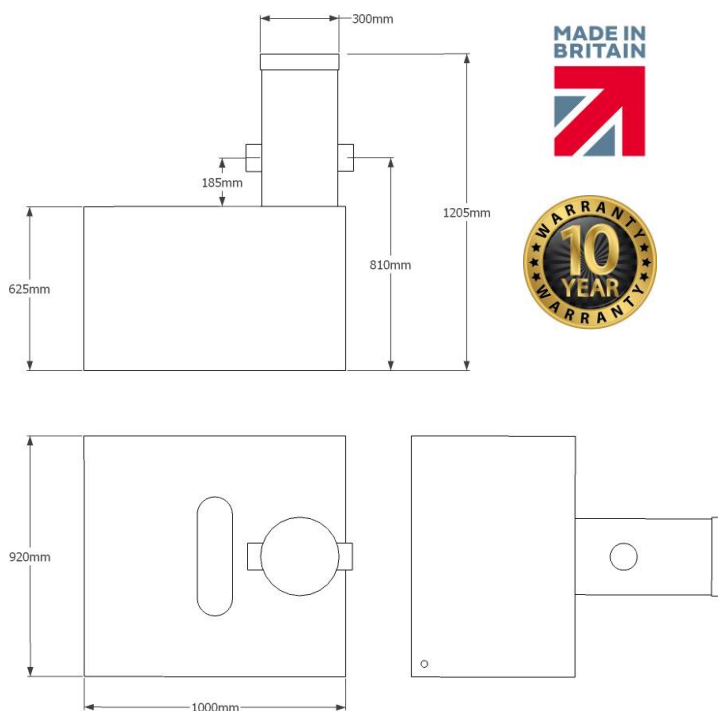

Product Information						
Height (without neck)	Height (with neck)	Width	Length	Access	Weight	Outlet
625mm	1200mm	920mm	1000mm	300mm	40kg	1" BSP

Sizes approximate, owing to shrinkage

PRODUCT NOTES:

- Please ensure that the Installation Guidelines have been read and understood before commencing installation
- Only lift when empty
- If installed in a high water table or heavy clay soil, this water tank must be fully encased in concrete
- Designed to take pedestrian traffic only; if required to carry vehicular traffic, a structural engineer's design is required
- Top of the tank body must not finish any more than 500mm below ground level (access chamber flush with ground level)
- Without a structural engineer's design, tank must not be located adjacent to foundations, raised banks, patios or walls
- Pipe-falls should be a minimum of 2:100 in the direction of water-flow, i.e. rainwater pipe and service duct towards the tank and the overflow away from the tank

PRODUCT DETAILS:

- Made from virgin polymer
- One piece mould for extra strength
- Extended neck included; can be cut down
- Designed and manufactured in the UK

OPTIONAL EXTRAS:

- Filter box
- Range of pumps
- Tank connectors
- MDPE pipe

BENEFITS:

- Compatible with UK standard 4" (110mm) pipe fittings
- Connect multiple tanks together using 4" drainage pipe
- 1" BSP outlet is ideal for external pump connections
- Rotationally moulded for strength and durability
- 10 year warranty against manufacturing defects



Etilis Ltd,
Unit 1 Whiting Way,
Melbourn,
Royston,
SG8 6NA

Call 01763 261781