
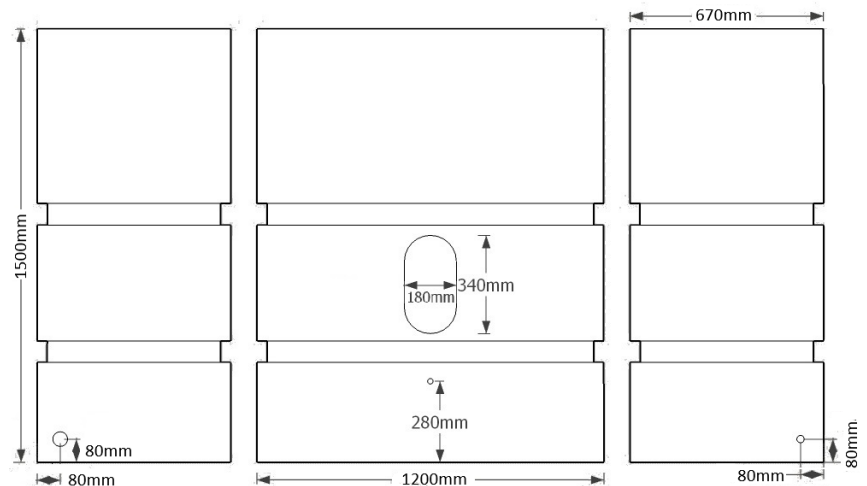


ECO1200PILPOT

Product description: 1200 litre pillar water tank, with multiple outlets, suitable for the storage of drinking water

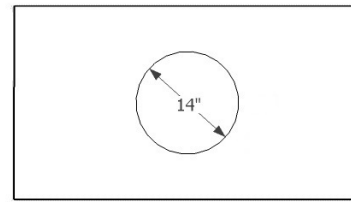

Product Information

Height	Width	Depth	Weight	Outlets	Lid
1500mm	1200mm	670mm	65kg	1 x 3/4", 1 x 1" (RHS) 1 x 2" (LHS)	14"

PRODUCT NOTES:

Sizes approximate, owing to shrinkage

- Tanks must be sited on a level, fully supportive base, leaving a 50mm expansion gap between any wall and the **centre** of the back or side of the tank
- Tanks must be installed in accordance with The Water Supply (Water Fittings) Regulations 1999 in order to be properly used for storage of drinking water. This will include the addition of fittings which are not supplied with the tank unless ordered separately.
- Outlets not drilled, unless requested
- Additional fittings can be added as and where required without compromising tank's structural integrity.

PRODUCT DETAILS:

- Made from WRAS approved polymer
- Approximate wall thickness: 6-7mm
- Non-vented 14" lid as standard
- 3/4" BSP raised brass threaded outlet
- Bottom outlets (1" on RHS, 2" on LHS) ideal for linking tanks, or connecting to an irrigation hose or pipework e.g. for an external pump

OPTIONAL EXTRAS:

- Brass tap
- Brass isolation valve
- Byelaw kit
- Ball cock and float valve
- Tank connectors
- Connection kit (for linking tanks)

BENEFITS:

- Suitable for internal and external use
- Frost-proof; plastic will not crack in cold
- Plastic meets the requirements of BS 6920-1:2000
- Plastic will not contaminate water
- Slimline shape, ideal when space is limited
- Holds shape when full of water
- Robust, heavy duty product; industrial strength
- Rotationally moulded for strength & durability
- 2 year warranty against manufacturing defects



Etills Ltd,
Unit 1 Whiting Way,
Melbourn,
Royston,
SG8 6NA

Call 01763 261781